

IPhone Monitor Operating Instruction

1. Firstly go to APP Store to search Admin Vision and download the Admin Vision from APP store in your iPhone. Then install it. The picture is as below.






2. Download the Admin vision into your iPhone. After finished the installation, click the icon "Admin Vision".






3. Then click button. The Device List will be displayed in the screen. User should firstly add device by pressing button.

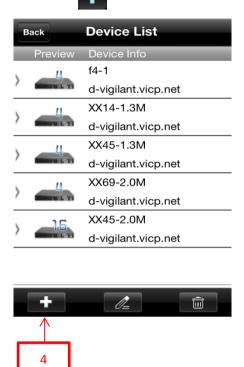



4. After add the device, user can configure the parameters as below.



DVR title: any name you like


Server: domain name you registered in DDNS Page.

IPhone port: input the iPhone port

User name: same as the user name of DVR you registered in DDNS Page Password: same as the password of DVR you registered in DDNS Page


Max channel: choose the max channel of your DVR

5. After add the device successfully, it will form a device list, and user can add several DVR at the same time.



6. After you finished adding device, click "back" button, and user can select one channel, click icon to begin monitor. Connect the device, so you can view the image. If you can't see the image, please check whether the parameters you set are right. Then it will display as below picture.




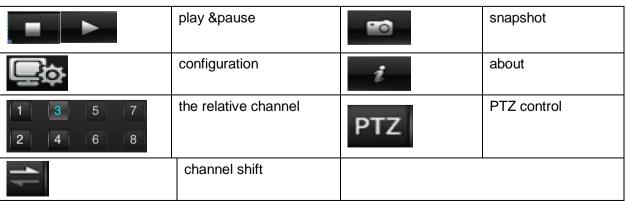

7. Click PTZ control, so user can control PTZ camera.



- : pressing those buttons, user can control the direction of PTZ camera.
- e leading those buttons, user can adjust the zoom, focus and iris.
- 8. User can add several devices to monitor at the same time.





(Horizontal view)


For the iPhone Monitor Operation, HVR, NVR and IP Camera operation should change the name to HVR, NVR or IP, and the rest steps are the same as DVR operation.

IPad Monitor Operating Instruction


1. Firstly go to APP Store to search Admin Vision and download the Admin Vision from APP store in your iPad. Then install it. The operating steps are the same as iPhone operation.



2. After finished the installation, click the icon "Admin Vision", and then you can Click button to add your DVR first. The picture is shown as bellow.

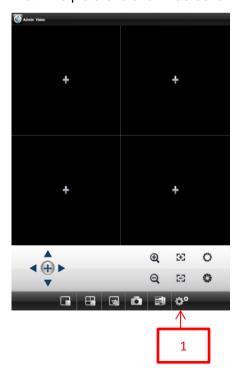


3. Click "Device List", and then click "Edit" to choose "Add". After these steps you can add the DVR device and set the parameters. You can add several DVR at the same time.

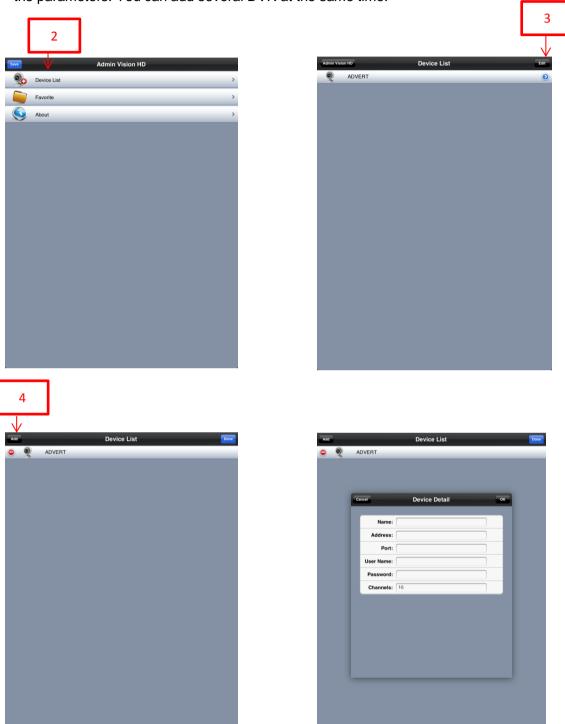




4. After successfully add the DVR, go back to the first interface and click to choose one channel, and the image will be displayed in the selected area.

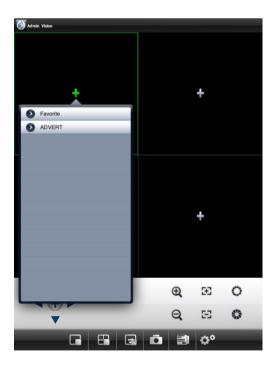


Note: if you want to monitor one channel, you can double-click the area.

5. If you can't see the image, please check whether the parameters you set are right. Choose "Device List" and then choose the channel whose parameters you want to change, click the white space and then a list will be displayed. You can click "Edit" (on the top right side) to change the wrong parameters. After change them, click "OK" to save the right parameters.

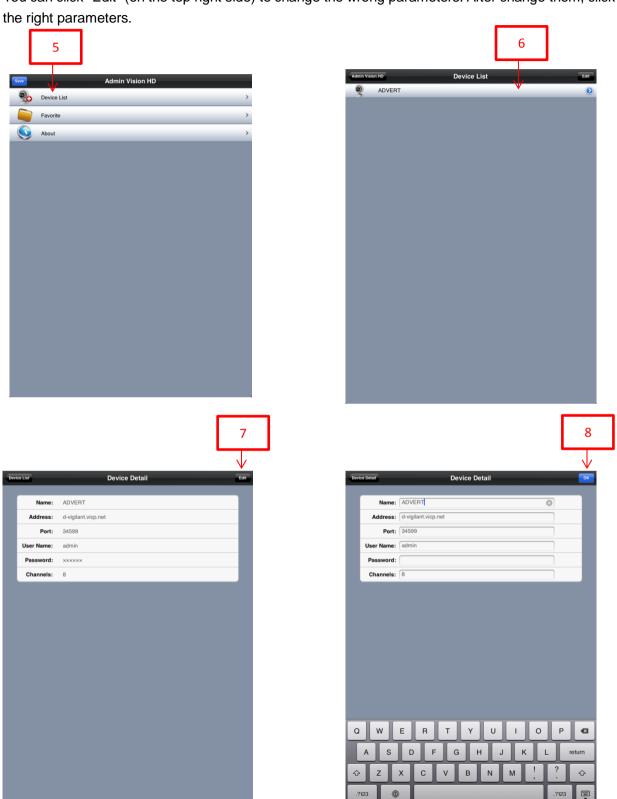

6. You can monitor several DVR at the same time.



	Change image of one channel		Change images of all the channels
	channel shift	Ō	snapshot
	Select DVR models	⇔	Enter Admin Vision HD
€ € 5	Adjust the zoom, focus and iris		
0			
	Select up, down, left and right		

For the iPad Monitor Operation, HVR, NVR and IP Camera operation should change the name to HVR, NVR or IP, and the rest steps are the same as DVR operation.

Mobile Monitor Operating Instruction

- 1. As for Android System, firstly, go to find the Mobile Monitor and find Adminvision_Android software (supplied in CD→ Software → Mobile Monitor → Adminvision_Android), and then setup the Android software in your mobile.
- 2. After finished the installation, click the icon "Admin Vision". Then click the button. The Device List will be displayed.





Note: you can add a new DVR by pressing "Add", and the steps are the same as iPhone operation. If you can't see the image, please check whether the parameters you set are right. The operation is the same as iPad operation.

3. You can monitor several DVR at the same time.



	play &pause		snapshot
	configuration	i	about
1 3 5 7 2 4 6 8	the relative channel	PTZ	PTZ control
1	channel shift		

4. Click PTZ control, so user can control PTZ camera.



: pressing those buttons, user can control the direction of PTZ camera.

Note: user can add several devices to monitor at the same time.

Notice: for Mobile Monitor (BlackBerry System and Symbian) Operation, the operating steps are the same as Android System, that is, firstly install the BlackBerry Software (or Symbian Software), which is supplied in CD \rightarrow Software \rightarrow Mobile Monitor \rightarrow Adminvision_BlackBerry (Adminvision_SB) and then follow the steps as like in Android System to operate.

For Mobile Monitor operation, HVR, NVR and IP Camera operation should change the name to HVR, NVR or IP, and the rest steps are the same as DVR operation.